





# Philmac

The connection you can trust.

## True Drip Fixed Flow Drippers

### Technical Specifications Sheet

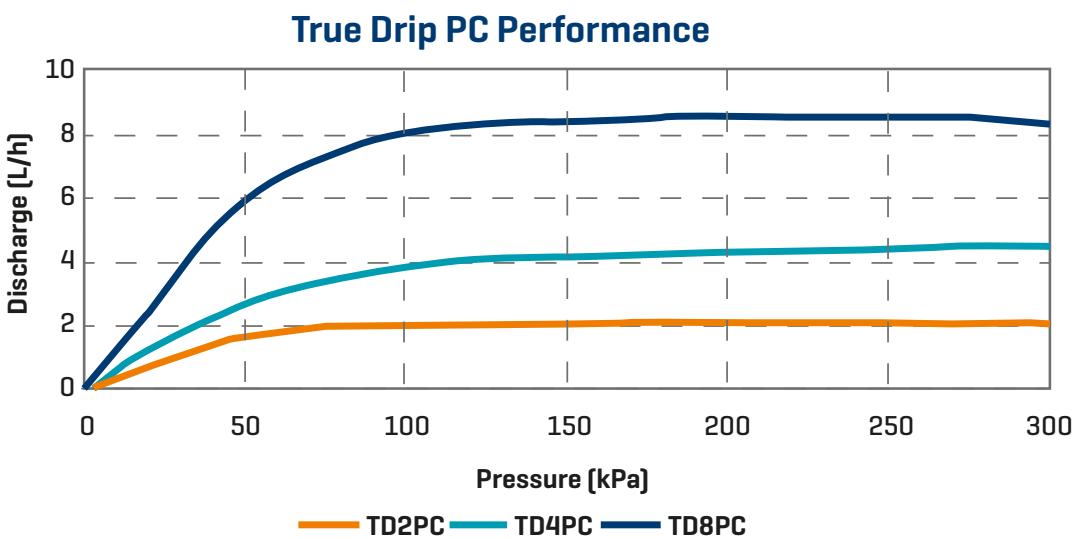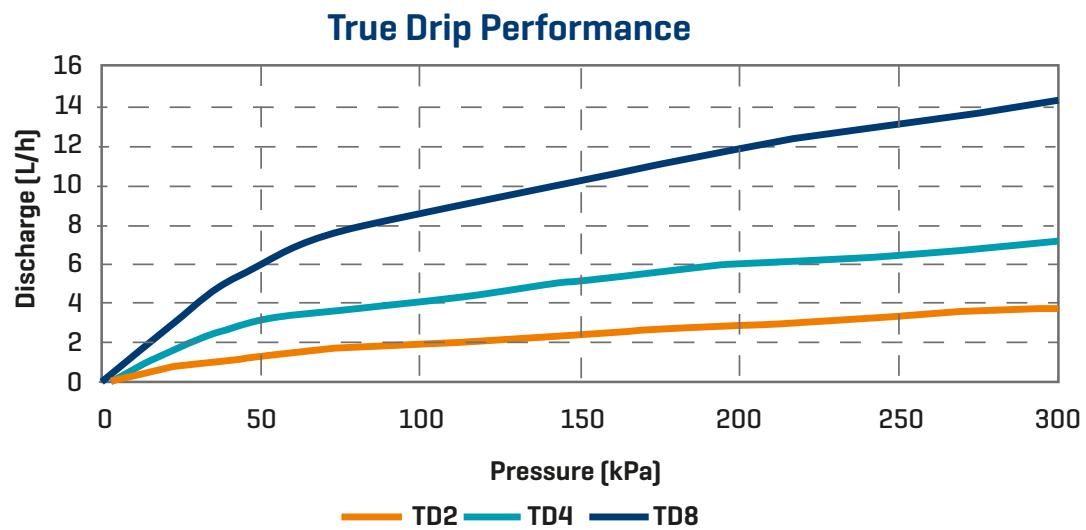

# True Drip fixed flow drippers




## Material Specifications

CODE	Description	Colour	L/h
TD2	True drip fixed flow - 4mm barbed inlet	Blue	2 L/h @ 100 kPa
TD4	True drip fixed flow - 4mm barbed inlet	Green	4 L/h @ 100 kPa
TD8	True drip fixed flow - 4mm barbed inlet	Red	8 L/h @ 100 kPa
TD2PC	True drip pressure compensating - 4mm barbed inlet	Blue	2 L/h @ 100 kPa
TD4PC	True drip pressure compensating - 4mm barbed inlet	Green	4 L/h @ 100 kPa
TD8PC	True drip pressure compensating - 4mm barbed inlet	Red	8 L/h @ 100 kPa

## Installation: True Drip fixed flow drippers

Example of typical vineyard installation

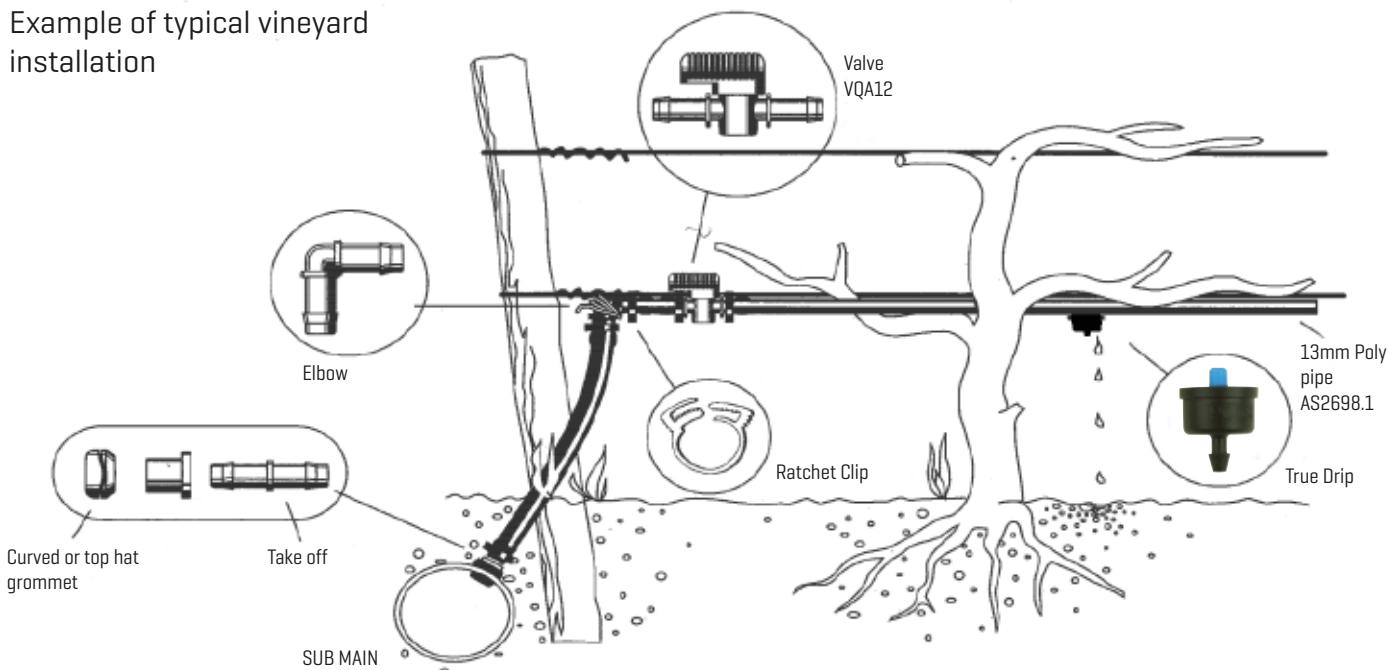

### RECOMMENDED USE:

Products described above are designed and manufactured for micro irrigation use and therefore have a maximum recommended operating pressure of 300kPa. The products must be used with suitable filtration (where applicable) to avoid blockage or damage to working components.

Please note that the information, opinions, recommendations and advice given on this specification sheet are supplied only to provide an improved understanding of the technical aspects of Philmac products. So far as the law allows, Philmac Pty. Ltd. will not accept liability in respect of any loss or damage of any kind claimed to arise as result of reliance upon any information contained on this specification sheet. Please to our terms & conditions of supply: <https://www.philmac.com.au/terms-conditions-supply/>.

## For more information

Ph: 1800 755 899

[www.philmac.com.au](http://www.philmac.com.au)

[www.youtube.com/user/PhilmacAustralia](http://www.youtube.com/user/PhilmacAustralia)